



MOVA LOOP DIMENSIONS LOWER BRISTOL ROAD NEAR OAK STREET, BATH					
LOOP NAME	DISTANCE FROM STOP LINE (M)	DISTANCE FROM NEAR SIDE (M)	DISTANCE FROM OFF SIDE (M)	LOOP WIDTH (M)	NOTES
		A	B	C	
AIN1	87	0.4	0.8	1.7	Diamond
AX2	39	0.4	0.4	1.7	Diamond
AIN3	89	0.4	0.4	1.7	Diamond
AX4	39	0.4	0.8	1.7	Diamond



- NOTES CONTINUED
7. Signal heads and AGD's shall be aligned to the satisfaction of the Engineer on the day of commissioning.
8. All traffic signal equipment will have at least 450mm clearance from carriageway. For all pole positions see pole setting out table.
9. The traffic signal contractor shall be responsible for the set-up and validation of MOVA immediately following commissioning of the installation.
10. All traffic signal equipment to be of ELV / LED type.
11. All traffic signal poles and controller will be black in colour.
12. Audible signal devices shall be mounted within right hand side pedestrian demand unit only and shall incorporate an integral volume control. Audibles will also be timetabled not to sound between the hours of 22:30 and 06:30.
13. All signal poles will be labelled (50mm min height labels) as per B&NES specification and displayed on all pole on the day of commissioning.
14. Feeder pillar must be of suitable size to house cut out fuse carrier making sure the door to be able to close correctly. Electricity connection to be order by civils contractor. Once ordered must inform B&NES with MPAN no. to enable ordering of SMARTmeter by B&NES
15. All detector loop positions and orientation to be agreed on site by B&NES signal engineer. All detector loops must have a minimum clearance to any existing or proposed metalwork of at least 0.5m.
16. Traffic signal heads will be installed at minimum clearance of 2.4m from ground level to the bottom edge of signal head.
17. All traffic signal equipment including controller to be provided by Dynniq.
18. NAL controller cabinet base to be installed, correct cabinet base will need to be ordered based on controller type installed. Base will galvanised steel and painted black.
19. B&NES standard details for civil engineering installation works should be referred / refinanced to, to ensure the equipment is installed to correct specification.
20. A MOVA specialist must be employed by the developer to complete cruise speed measurements prior to construction drawings being issued and thereafter complete the Factory Acceptance test (FAT), Site acceptance Test (SAT), TR2500 forms, MOVA dataset creation and MOVA validation.

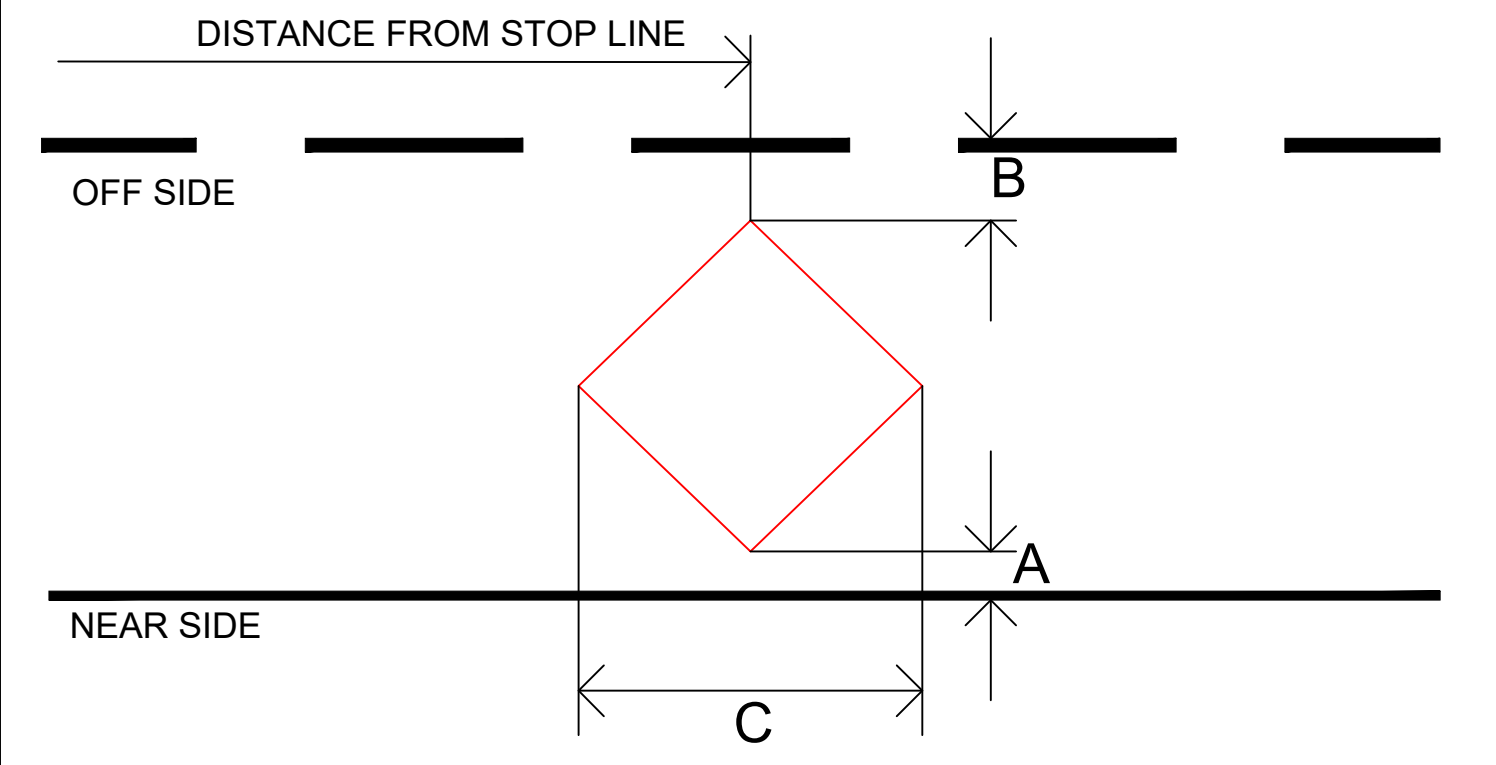

POLE SETTING OUT DETAILS - LOWER BRISTOL ROAD NEAR OAK STREET, BATH					
POLE NUMBER	DISTANCE FROM STOP LINE (M)	DISTANCE FROM CARRIAGEWAY (M)	DISTANCE FROM TACTILE PAVING	POLE WIDTH (MM)	POLE TYPE
1	N/A	0.55	0.5	114	STRAIGHT
2	N/A	0.55	0.5	114	STRAIGHT
3	N/A	0.55	0.5	114	STRAIGHT
4	N/A	0.55	0.5	114	STRAIGHT

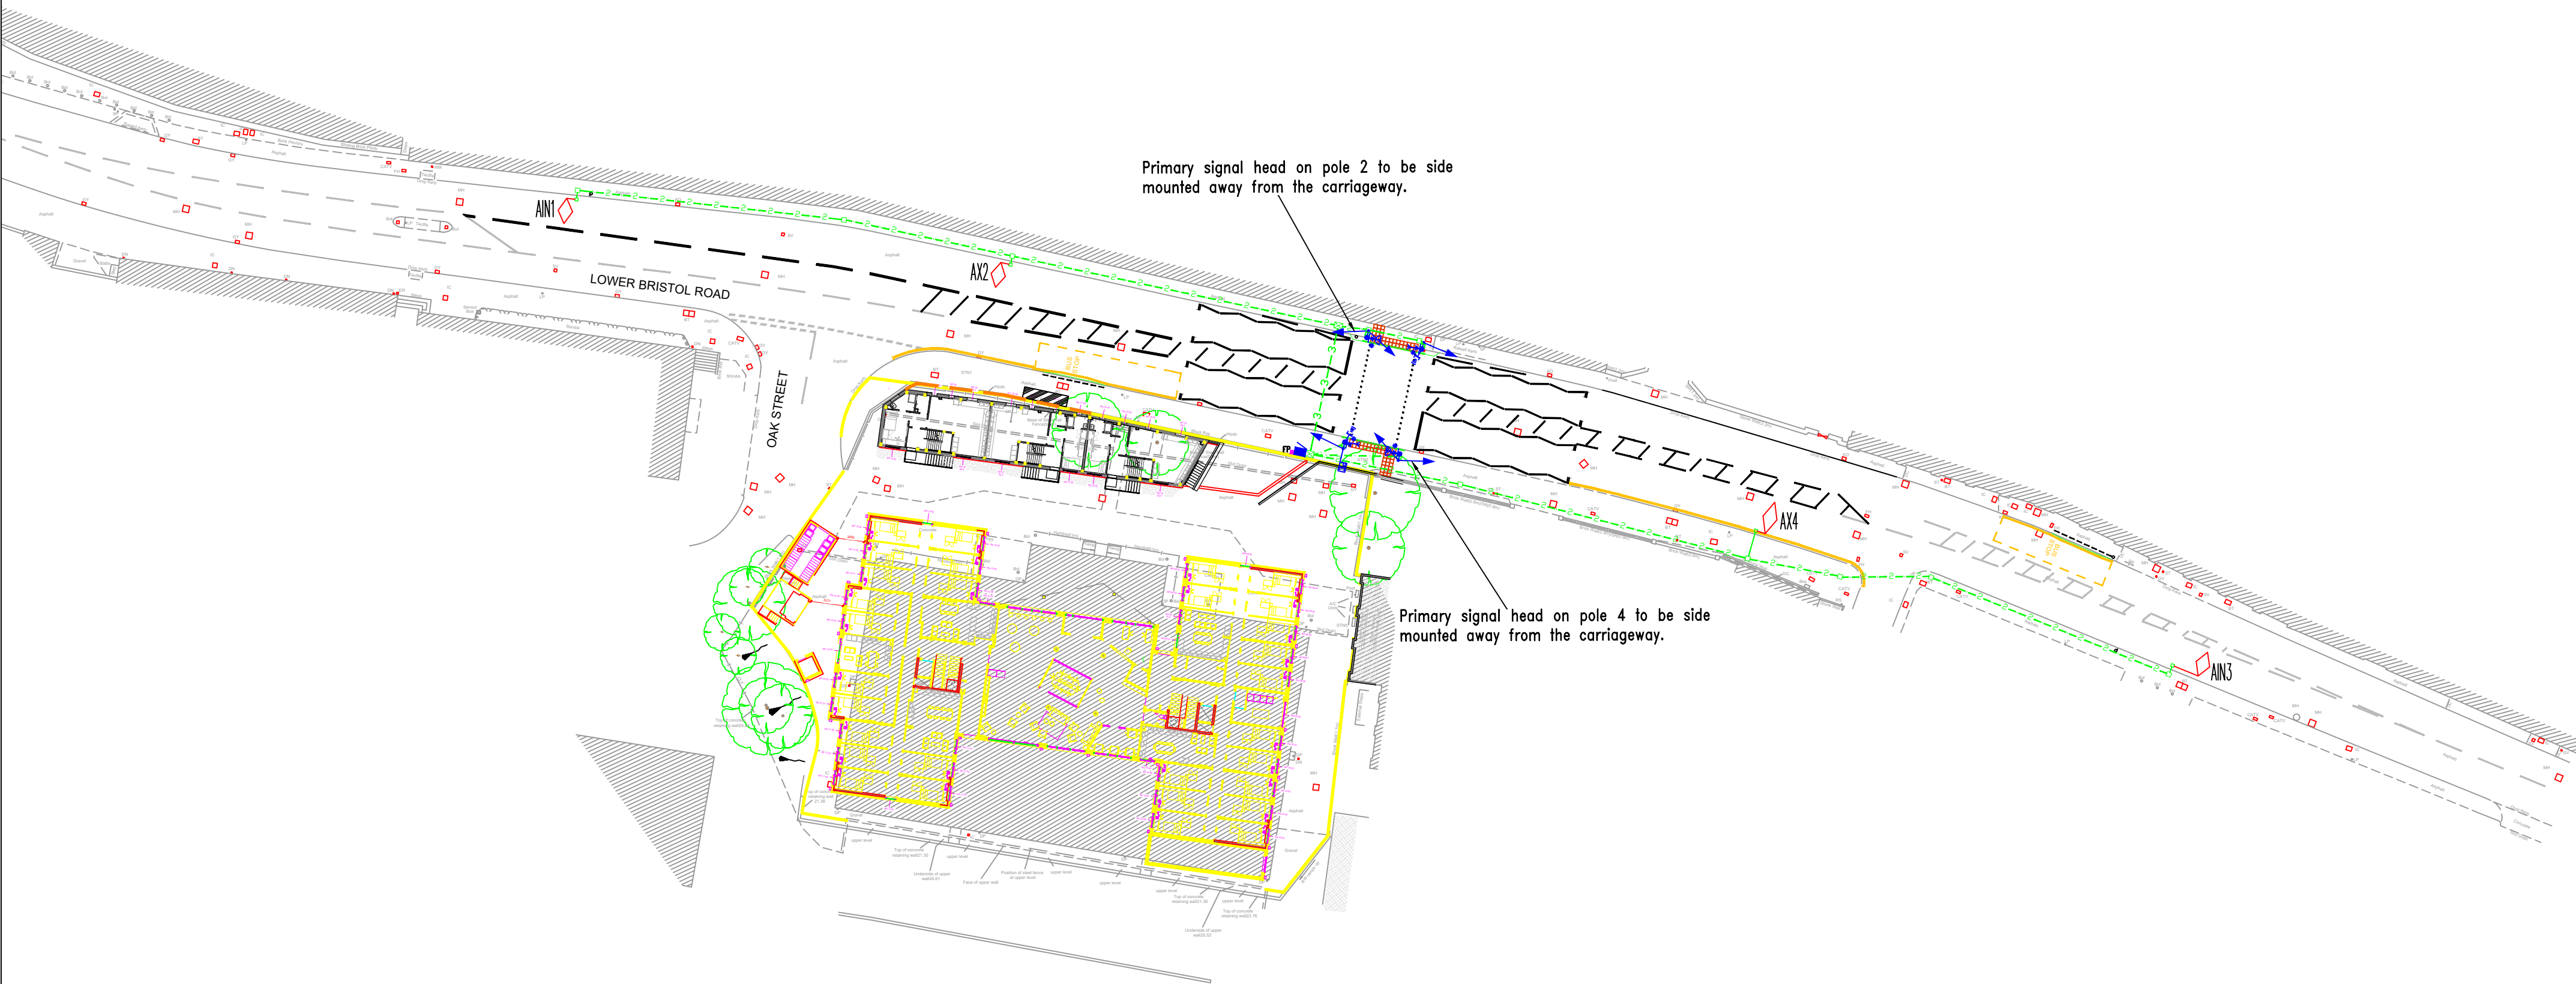

DRAWING N°
C/1571/100

ISSUE
4

KEY:-

- Standard 4.0m galvanised steel painted black pole with top cap terminations
- VEHICLE SIGNAL HEADS
- RAG fitted with primary hoods
- PEDESTRIAN SIGNAL HEADS
- Puffin near sided indicator
- Nearside pedestrian push button wait indicator
- Tactile device, fully monitored
- ELV PTC-1 Traffic signal controller (See note 18)
- Charles Endirect BDP70 pillar (Black). Pillar needs to be large enough to accommodate a local authority SMART meter
- 300mm Extension 'D bracket'
- Photo cell
- DETECTION
- MOVA detection
- On crossing detector
- Kerb side detector
- DUCTING AND CHAMBERS
- 1 No. Polyethelene 100mm duct
- 2 No. Polyethelene 100mm duct
- 3 No. Polyethelene 100mm duct
- Pole and RS115 NAL retention socket installed to a depth of 750mm x 610mm x 610mm
- NAL STAKKAbox 600mm x 600mm, Twin walled access chambers, composite covers to B125
- NAL STAKKAbox 450mm x 450mm, Twin walled access chambers, composite covers to B125
- NAL carriageway loop chamber, ductile iron D400 to B2789

TRAFFIC SIGNAL NOTES

1. Carriageway markings to be laid in accordance with "The Traffic Signs Regulations and General Directions 2016"

2. Nearsided Toucan indicator on pole 4 to be angled 30 degrees away from traffic, pole 2 shall be angled towards the carriageway and undertaken on site by Bath and North East Somerset (BANES) and Dynniq engineer at SAT.

3. Traffic signal ducting should be orange in colour, high density polyethylene solid wall ducting of 100mm diameter with traffic signals marked on it every 1m. Draw ropes should be provided in the duct runs for the use of pulling cable. All ducting to have smooth internal and external face and a wall thickness of no less than 4.75mm, corrugated ducting will not be accepted. Cut ducts will not be accepted unless at a duct chamber position.

4. New Dynniq PTC-1 Traffic signal controller plus supplied and configured 3G Siemens UTC / MOVA Stratos enabled Outstation Transmission Unit with UTC control and MOVA 7 licences connected via a Siemens supplied and configured 4G router (SIM card to be supplied by BANES)

5. All traffic signal equipment positions and orientation to be agreed on site by BANES Engineer or their representative.

6. Tactile devices shall be monitorable and mounted within all pedestrian demand units only and shall protrude from the underside of the unit.

DO NOT SCALE

4	Amended to B&NES comments 05/03/20.	JPS	LC	06.03.20
3	Amended to new GA layout, ducting for comms connection removed and note 4 updated.	JPS	LC	22.01.20
2	Amended to B&NES comments.	JPS	LC	09.10.19

ISSUE	DESCRIPTION	DRN	CHK	DATE

CLIENT
DYNNIQ UK LTD

SCHEME TITLE
PROPOSED PUFFIN CROSSING
LOWER BRISTOL ROAD NEAR OAK STREET, BATH

DATE: 09/04/19	DRN: JPS	CHKD: LC	SCALE: 1:500 @ A1
Canwell Ltd Faraday Wharf Innovation Birmingham Campus Holt Street Birmingham Science Park Aston Birmingham, B7 4BB T 0121 250 5725 E enquiries@canwell.co.uk			DRAWING N°: C/1571/100

STATUS: DETAIL DESIGN